

Aqua Rain Guideline Form (GA03)

Rev. 1/10/24

Date: / /

Builder Name:

Dist.:

Job Name:

Contact:

Phone:

Phone:

Email:


Email:

Application descriptions:

Profile A is the traditional Rain Fall application where nozzle is installed over a structural member.

Profile B is this same Rain Fall application where the nozzle angle is required to modify the direction of water.

Profile C is the shorter nozzle application formerly known as the Shower for more compact Rain fixture applications.

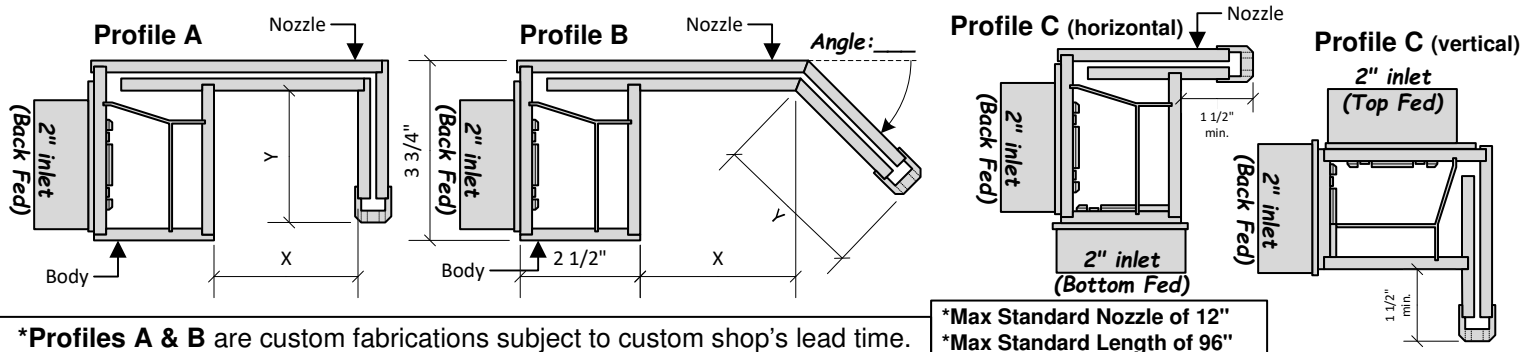

*Profiles A & B are custom fabrications subject to custom shop's lead time.


*Max Standard Nozzle of 12"
*Max Standard Length of 96"

- Which Profile: _____
- Unit Length: _____
- Nozzle Length: _____ (Profile C)
- How many units do you need: _____
- If Profile "C" (circle): Horizontal Vertical
- Back Fed or Bottom Fed (circle): Back Bottom Top
- "X" Length: _____ "Y" Length: _____ (Profile A & B)
- Angle of Nozzle: _____ (Profile B)


Circle a Nozzle Color:

White Black Gray Tan
(circle one)
Bronze Silver Copper


Circle One:

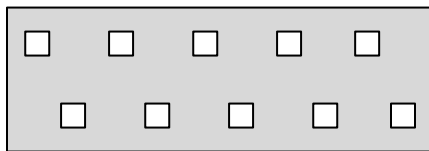

SDR .67 gpm/in.
Minimum nozzle length = 1 1/2"

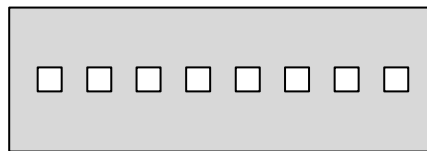

SSR .5 gpm/in.
Minimum nozzle length = 1 1/8"

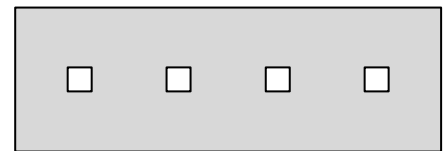

SSR .25 gpm/in.
Minimum nozzle length = 1 1/8"

*A mounting strip can be added for you to attach a strip light of your choosing.

*Mounting Tabs w/Gussets may be required for installation; please schedule a consult for details.

*Every fixture can be fabricated on the radius of the structure; ask us about it!



P.O. Box 5375 Spring Hill, FL 34611
Ph: (888) 683-0042
Fax: (877) 683-3442
Email: sales@gawcinc.com
www.gawcinc.com

To Be Completed by: Great American Waterfall Co.

Product Number

Price

Availability